

Elastomeric High Tensile Non-Marking Rubber Wheels

RAPIDSTOCK

RWM Elastomeric High Tensile Rubber Wheels are incredible molded rubber wheels. The high quality high tensile premium rubber is bonded to a heavy-duty solid web cast iron core that provides superior strength. These wheels are rated at 200% more than normal molded rubber wheels. This rubber wheel will not crack, chunk, dry out or debond. These elastomeric high tensile rubber wheels are excellent for towing applications in both indoor or outdoor environments. The special compound will not mark your floors. These rubber wheels can be used at higher rated towing speeds than other wheels. Please contact the factory for additional information.

Features

Hardness: 70-75 Shore A Durometer

Applications

RWM Elastomeric High Tensile Rubber Wheels provide excellent floor protection, are quiet and roll easily over debris. They will not mark floors. They are an excellent caster for large assembly plants, freight terminals, automotive plants, and continuous use operations.



RAB-0820-08-EHT-NM

Elastomeric High Tensile Rubber Wheels

RAPIDSTOCK


RWM Elastomeric High Tensile Rubber Wheels are incredible molded rubber wheels. The solid core provides superior strength and the rubber does not chunk out. These rubber wheels perform well at 200% of normal molded rubber capacity and are excellent for towing applications. These elastomeric high tensile rubber wheels may mark floors. These lighter rubber wheels reduce the weight of carts and increase amount of loads that carts can carry.

Features

Hardness: 70 - 75 Shore A Durometer





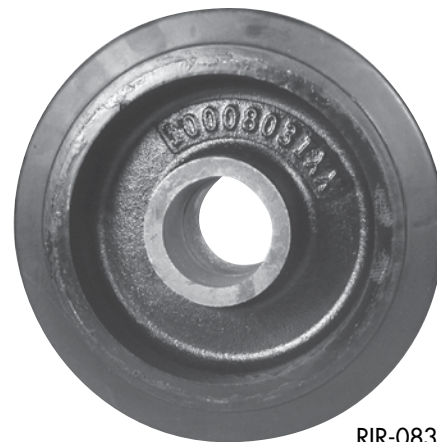



Applications









RWM Elastomeric High Tensile Rubber Wheels may be the best all purpose towing wheel available in the industry.



RIR-0830-31-EHT

UP TO 2,280 POUND CAPACITY

SPECIFICATIONS							
 Wheel Diameter	 Wheel Width	 lbs. Capacity	 Axle Diameter	 Sealed Precision Ball Bearing	 Tapered Roller Bearing	 Hub Length	 lbs. Approx Weight
4"	2"	700	1/2"	RAB-0420-08-EHT-NM		2-1/2"	1.6
			5/8"	RAB-0420-10-EHT-NM			
5"	2"	800	1/2"	RAB-0520-08-EHT-NM		2-1/2"	2.0
			5/8"	RAB-0520-10-EHT-NM			
6"	2"	820	1/2"	RAB-0620-08-EHT-NM		2-1/2"	2.7
			5/8"	RAB-0620-10-EHT-NM			
8"	2"	1000	1/2"	RAB-0820-08-EHT-NM		2-1/2"	3.7
			5/8"	RAB-0820-10-EHT-NM			
10"	3"	2000	3/4"	RAB-1030-12-EHT-NM	RAT-1030-12-EHT-NM	3-1/2"	10.0
			1"	RAB-1030-16-EHT-NM	RAT-1030-16-EHT-NM		
12"	3"	2280	3/4"	RAB-1230-12-EHT-NM	RAT-1230-12-EHT-NM	3-1/2"	14.5
			1"	RAB-1230-16-EHT-NM	RAT-1230-16-EHT-NM		
			1-1/4"		RAT-1230-20-EHT-NM		

SPECIFICATIONS							
 Wheel Diameter	 Wheel Width	 lbs. Capacity	 Axle Diameter	 Straight Roller Bearing	 Tapered Roller Bearing	 Hub Length	 lbs. Approx Weight
6"	2-1/2"	1080	3/4"	RIR-0625-12-EHT-SI	RIT-0625-12-EHT	3-1/2"	10.0
			1"	RIR-0625-16-EHT	RIT-0625-16-EHT		
			1"	RIR-0625-16-EHT-SI			
			1-1/4"	RIR-0625-20-EHT			
6"	3"	1360	3/4"	RIR-0630-12-EHT-SI	RIT-0630-12-EHT	3-1/2"	11.2
			1"	RIR-0630-16-EHT	RIT-0630-16-EHT		
			1"	RIR-0630-16-EHT-SI			
			1-1/4"	RIR-0630-20-EHT			
8"	2-1/2"	1340	3/4"	RIR-0825-12-EHT-SI	RIT-0825-12-EHT	3-1/2"	11.5
			1"	RIR-0825-16-EHT	RIT-0825-16-EHT		
			1"	RIR-0825-16-EHT-SI			
			1-1/4"	RIR-0825-20-EHT			
8"	3"	1680	3/4"	RIR-0830-12-EHT-SI	RIT-0830-12-EHT	3-1/2"	13.0
			1"	RIR-0830-16-EHT-SI			
			1"	RIR-0830-16-EHT	RIT-0830-16-EHT		
			1-1/4"	RIR-0830-20-EHT			
10"	2-1/2"	1580	3/4"	RIR-1025-12-EHT-S	RIT-1025-12-EHT	3-1/2"	13.0
			1"	RIR-1025-16-EHT	RIT-1025-16-EHT		
			1"	RIR-1025-16-EHT-SI			
			1-1/4"	RIR-1025-20-EHT			
10"	3"	2000	3/4"	RIR-1030-12-EHT-SI	RIT-1030-12-EHT	3-1/2"	15.0
			1"	RIR-1030-16-EHT	RIT-1030-16-EHT		
			1"	RIR-1030-16-EHT-SI			
			1-1/4"	RIR-1030-20-EHT			
12"	3"	2280	3/4"	RIR-1230-12-EHT-SI	RIT-1230-12-EHT	3-1/2"	21.0
			1"	RIR-1230-16-EHT	RIT-1230-16-EHT		
			1"	RIR-1230-16-EHT-SI			
			1-1/4"	RIR-1230-20-EHT			

UP TO 2,280 POUND CAPACITY