

# Office Product Casters

RAPIDSTOCK

The Office Product Casters are made to support and move heavy office equipment such as copiers, business machines, computers and computer storage devices, large printers, refrigerated displays and vending machines. The polypropylene wheel offers excellent floor and carpet protection, quiet operation and has excellent impact resistance.

## Features

**Swivel Section:** Double ball bearing raceway

**Kingpin:** 1/2" diameter hydraulically pressed kingpin

**Axle:** 1/2" diameter

**Finish:** Zinc

**Wheels:** Only available in 3" diameter with plain bearing

**Mounting Plate Size:** 3-1/8" x 4-1/8"

**Bolt Hole Spacing:** 2-3/8" x 3-3/8"

**Mounting Bolt Diameter:** 5/16"



OP-POP-0320-S

# Shopping Cart Casters

RAPIDSTOCK

Provides easy rollability and quiet operation for shopping cart use.

## Features

**Stem Size:** 1/2 inch diameter 13 NC thread 1" long

**Rigs:** Zinc Plated to resist rust and corrosion



27-UPB-0512-S-SC

# LS (Locking Stem) Series Casters

RAPIDSTOCK

The Locking Stem Scaffold Casters are made to accurately brake at various positions. The brake locks the wheel and swivel simultaneously. Serrations in the brake lever and top plate ensure stability.

## Features

**Swivel Section:** Cold forged double ball raceway. Swivel section is equipped with a lubrication fitting for field maintenance. Legs are made from 1/4" steel and are welded to the outer race both inside and out for added strength. The brake support brackets are an integral part of the leg stamping, not welded on. This ensures accurate brake lever positioning and provides a sturdier brake support structure. Stepping on the brake handle simultaneously locks the wheel and swivel assembly. The swivel lock portion uses serrations in the brake lever and top plate to ensure a positive lock.


**Kingpin:** 5/8" diameter bolt and lock nut

**Stem:** 1-3/8" diameter 3-3/4" long with a 7/16" diameter hole drilled 2-5/16" up from the top plate

**Axle:** 1/2" diameter steel

**Finish:** Zinc plated to protect against corrosion

**Wheel:** Rubber on iron core with an axle lubrication fitting included

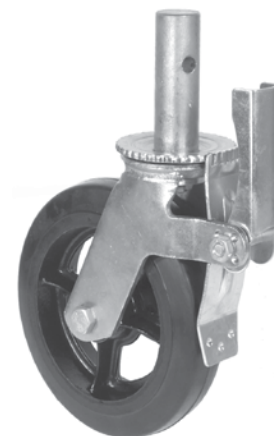


LS-RIR-0820-S-EC

UP TO 550 POUND CAPACITY

## SPECIFICATIONS

Wheel Diameter	Wheel Width	Wheel Type	Capacity lbs.	Overall Height	Plain Bearing	Swivel Lead	Approx Weight
3"	2"	Polypropylene	550 lbs	4"	OP-POP-0320-S	2-1/2"	2.0

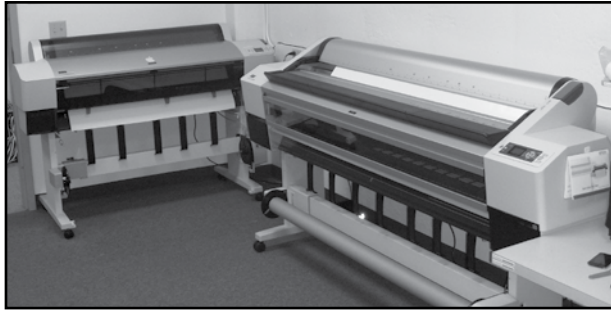

# Shopping Cart Casters

## SPECIFICATIONS

Wheel Diameter	Wheel Width	Wheel Type	Capacity lbs.	Overall Height	Ball Bearing	Swivel Lead	Approx Weight
5"	1-1/4"	Urethane Polypropylene	300 lbs	6-5/16"	27-UPB-0512-S-SC	1-3/16"	3.0



# Locking Stem Series Casters

## SPECIFICATIONS

Wheel Diameter	Wheel Width	Wheel Type	Capacity lbs.	Overall Height	Straight Roller Bearing	Swivel Lead	Approx Weight
6"	2"	Rubber on Iron	410 lbs	7-1/2"	LS-RIR-0620-S-EC	1-15/16"	10.0
8"	2"	Rubber on Iron	500 lbs	9-1/4" ±1/16"	LS-RIR-0820-S-EC	2-1/4"	12.0



UP TO 550 POUND CAPACITY